


2.2 SCT PRO

2.2.1 Technical specification

SCT PRO **cat # RM – ATSR-SCTPRO**

Type	W-FAST
Number of Scoring Zones	Up to 8 scoring zones
Hit Indications	Short Circuit Target up to 8 Zones (SCT) ,Worldwide Patented and patent pending
Accuracy of Indication	98% report Accuracy, No sensor adjustment for any type of projectile or distance
Ports	Micro USB Charging, pop up port firmware updates expansions
Voltage	3.7V, Chargeable
Operating temperatures	-25°C ÷ 60 °C
Operating Wireless Range from display	Up to 1500 Meter/1600 Yard Line of sight
Operating time with regular battery pack	140 Hours
Color	Black ,Nato Olive, Beige , other color per request
WEGIHT:	
STAND	5.3 Kg /11.7lb
SCT GRIP(ARM8)	0.7Kg /1.5lb
5.56mm,9mm,7.62mm Protection plate	3.5Kg/7.7lb
Anti ricochet protection	0.5Kg/1.1lb
Total	10Kg /22lb
Height when stand is open	810mm/31.8 inch
Length when stand is folded	775mm/30. inch
Time from folded to open	Up to 2 Min
Material	Plastic and Alum

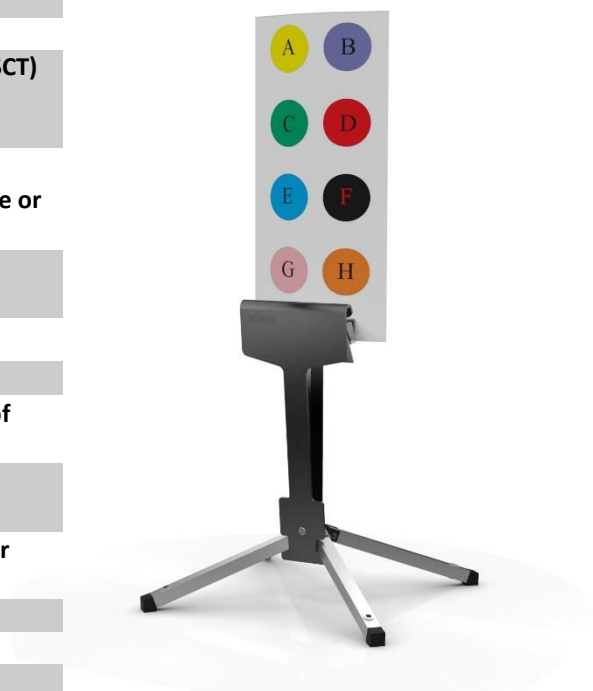

ROMITES

SHORT CIRCUIT TARGETS

Display :

Technical specification

SCT PRO cat # RM – ATSR-SCTPRO

Type	W-FAST
Number of Scoring Zones	Up to 8 scoring zones
Hit Indications	Short Circuit Target on target up to 8 Zones (SCT) ,Worldwide Patented
Accuracy of Indication	98% report Accuracy, No sensor adjustment for any type of projectile or distance
Ports	Micro USB Charging& firmware updates expansions , SD Card memory
Voltage	3.7V, Chargeable
Operating temperatures	-25°C ÷ 60 °C
Indications Operating Modes	8 scoring zones counting +total Hit split times Timed countdown Sound for every Hit Display Battery status Target Battery Status Wireless signal status
Digital Screens Operating Wireless Range	Up to 1500 Meter/1600 Yard Line of sight
Weight including Battery	1Kg including battery not including armor
Dimensions(LXWXH)	29.7CmX23CmX4.5Cm
Display size	19.5CmX14Cm
Display Type	LCD visible at direct sun
Operating time with regular battery pack	24 Hours
Di	
Color	Black
Material	Plastic and Alum

